

## Technical Data VACUDEST S

450 – 750 m<sup>3</sup> industrial wastewater per year

- VACUDEST Modular-System – Customized systems
- Energy efficient due to 95 % energy recycling
- Cost efficient due highest evaporation rates
- Maintenance friendly design to optimize system availability
- Comfortable Vacutouch control system including internet connection
- State of the art technology stands for highest distillate quality

# VACUDEST S

## VACUDEST Modular-System – Features

- Activepowerclean self-cleaning heat exchanger, to reduce operation cost
- Clearcat condensation stage for complete removal of hydrocarbons
- Destcontrol to further improve distillate quality
- e-service, internet connection of Vacutouch control system
- Premium exhaust air cooling, premium noise protection and much more




## Technical Data

VACUDEST	annual capacity*	Reference capacity with pure water	Average capacity with wastewater*	Electrical load	Weight (empty)	Energy consumption starting from
S 450	450 m <sup>3</sup>	75 l/h	56 l/h	7,5 kW	1,200 kg	60 kWh/m <sup>3</sup>
S 600	600 m <sup>3</sup>	100 l/h	80 l/h	11 kW	1,230 kg	60 kWh/m <sup>3</sup>
S 750	750 m <sup>3</sup>	125 l/h	94 l/h	11 kW	1,280 kg	60 kWh/m <sup>3</sup>

\* 8,000 hours of operation, 5 % average evaporation residue of the wastewater

## Dimensions (mm)

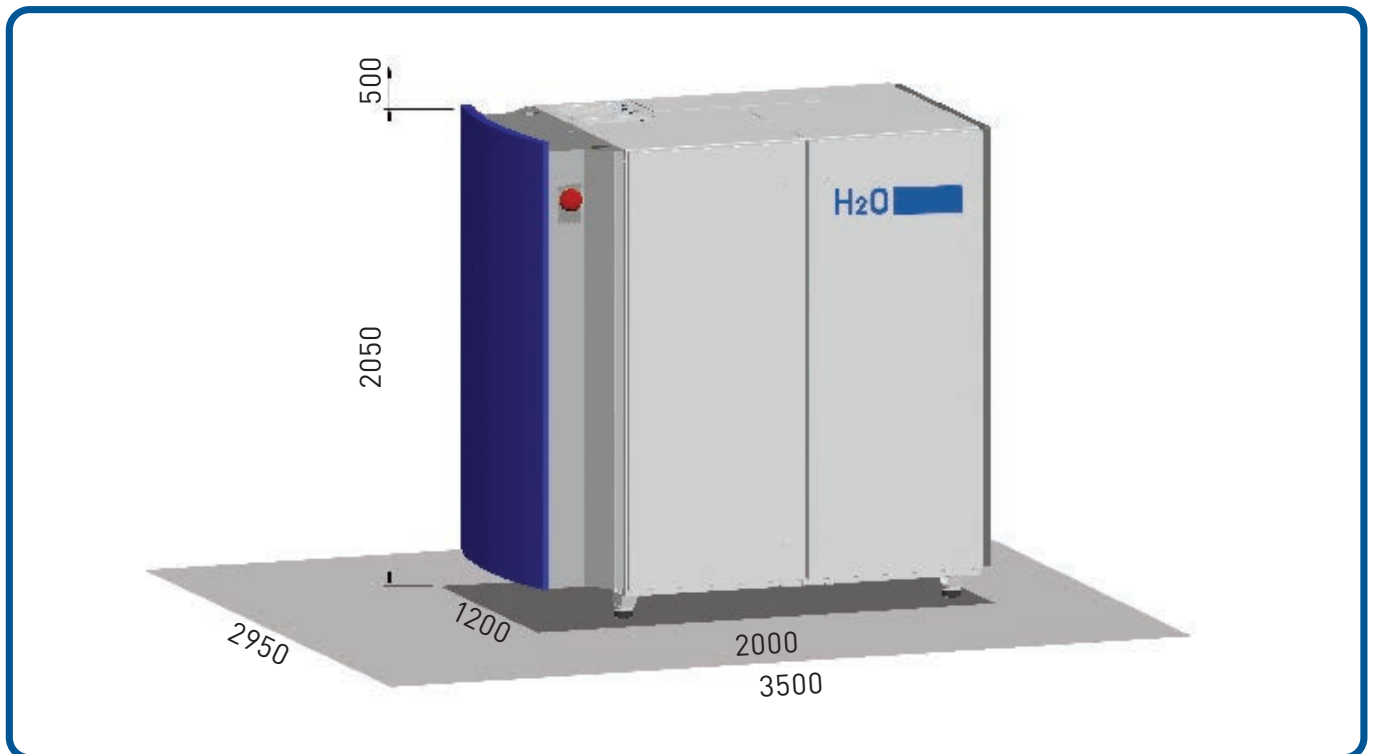

Dimensions of the VACUDEST vacuum distillation systems with optimal maintenance space

Copyright © H2O GmbH 2024 GB-DB-07/2024